

LAV Class 10A




www.lavscreen.com



Wireless R H P R W H C R Q S W V W P W K D W L V
ready to O L Q N Z L W K D Q \ R I W K E U D
in the P D U N H W

6FUHHQ 6XUIDFH
0DWWH :KLWH
0D[LPXP VL]H IW
:LGH 9LHZLQJ DQJOF
)XQJXV DLOGHZ UHVL
)ODPH UHQWUGa

3HUIHFW IRU
/DUJH PHHWLQJ URRPV
7KHDWUHWWHV
/a U J H F O D V V U R R P

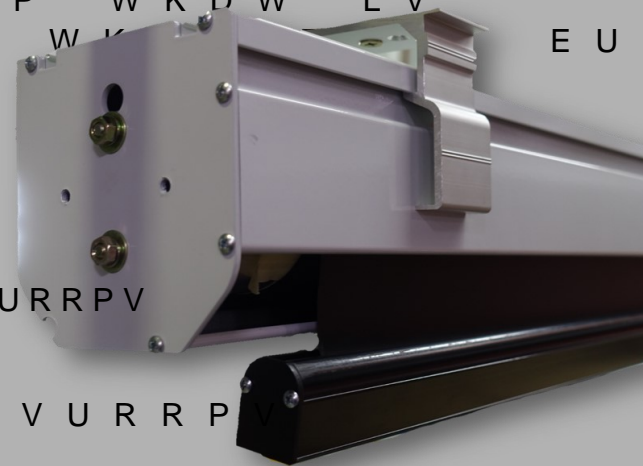

SCREEN TECHNICAL DATA SHEET



Screen Model	LAV Class 10A
Description	Standard Motorized Screen with Electronics and Remote Control

SCREEN SURFACE PROPERTIES

Fabric	Front projection with black fiberglass backing.
Black Borders	Yes
Color	Matte White
Gain	1
Viewing Angle	160°
Physical properties	Washable, Fire retardant & Mildew resistant
Thickness	0.33mm

SCREEN PHYSICAL PROPERTIES

Casing properties	Material	Aluminium Extrusion 2mm thick to reduce vibration
	Protection	Powder coated
	Color	Light Grey
Roller properties	Aluminium Extrusion	60mm diameter with re-inforcement profile for straightness
Bottom bar	Aluminium Extrusion	20mm diameter

MOTOR ELECTRICAL RATINGS

Lifting Capacity	20 NM
Sound level	44 to 47 dB
Speed	5 Meters per
Voltage	230 V
Current	0.77 Amps
Frequency	50 Hz
Power Input	170 W
Running Time	4 mins
Protection index	IP 44
Thermal protector cut-off temperature	150 °C
Maximum Turns	40
Cable Length	1 M
Cable Size	4 x 0.75 mm ²

MOTOR MECHANICAL PROPERTIES

Limit Switch	Progressive Adjustment Easily adjusted to set the exact distance of travel in both directions.
Rotor	Asynchronous single phase motors with built-in capacitors. Thermally protected. 100% enclosed, brushless motor.
Brake	Electromagnetic brake Automatically stops and holds the load in any position.
Gearbox	Planetary type gears. Lowers rotor speed and increase Torque. Permanently lubricated.

ELECTRONIC CONTROLS

Radio Frequency Transmitter (Handheld)	Model	LAV RF4843250
	Range	200M (unobstructed)/20M through 2 concrete walls
	Operating Temp.	-20 to 55 deg. C.
	Supply Voltage	12V DC
Receiver	Battery Type	3V CR2430
	Model	LAV RF4843250
	Supply Voltage	230V / 110'
	Frequency	50Hz
	Temperature range	0 to 70deg. C.
Transmitter (Wall Mounted)	Relay contact rating	5A 230V AC
	Transmitting Frequency	433.92MHz & 447 MHz
	Battery Type	3V CR2430
	Range	200M (unobstructed)/20M through 2 concrete walls
	Operating Temp.	-20 to 55 deg. C.

OTHERS

Motor	Quiet
Screen Fabric	Matte White
	Good diffusion level
	No glare / Hot spot
	Wide viewing angle
	Perfect corner to corner image uniformity
	Surface of screen is inherently white and there is no "paint" coating that may "peel" or fade away in due time.